

Exhaust Fan Schedule & Rooftop Equipment Plan

Doc No: HVAC-005

Rev: A

Date: 2026-05-16

Project: Lakefront Office Tower — Phase II

ACME Engineering Associates, Inc.
123 Industrial Pkwy, Suite 400
Chicago, IL 60601

SECTION 23 34 23 — HVAC POWER VENTILATORS

1.0 SCOPE OF WORK

Furnish and install exhaust fans, relief fans, and ventilators per drawings M4.01–M4.03. Coordinate roof curb locations with structural drawings S5.01–S5.03 and roofing specification Section 07 54 00.

2.0 ROOFTOP EQUIPMENT PLAN

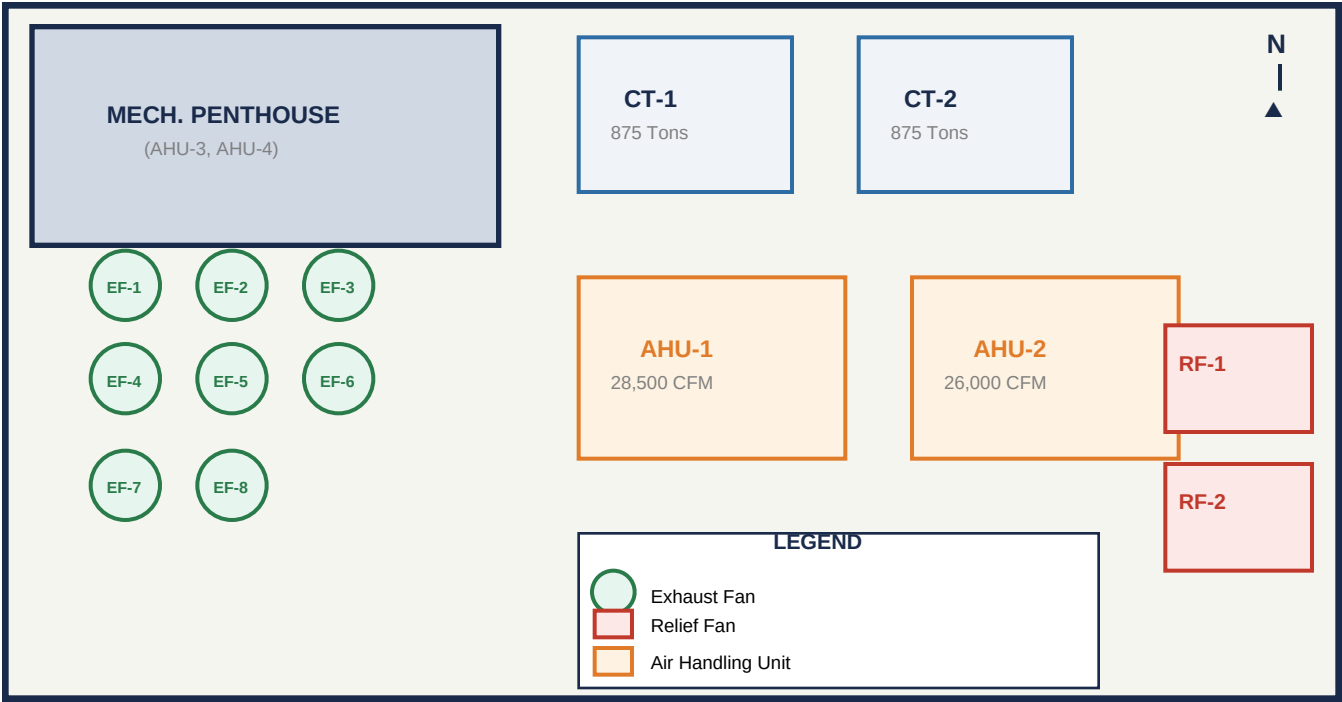


Figure 5 — Rooftop Mechanical Equipment Plan (Schematic — Not to Scale)

3.0 EXHAUST FAN SCHEDULE

Tag	Service	CFM	SP (in.)	HP	Drive	Discharge	Notes
EF-1	Toilet Exh. Floors 3–6	4,200	0.50	3	Direct	Vertical	Gravity back-draft damper
EF-2	Toilet Exh. Floors 7–10	4,200	0.50	3	Direct	Vertical	Gravity back-draft damper
EF-3	Toilet Exh. Floors 11–14	4,200	0.50	3	Direct	Vertical	Gravity back-draft damper
EF-4	Toilet Exh. Floors 15–18	3,600	0.50	3	Direct	Vertical	Gravity back-draft damper
EF-5	Parking Garage Exhaust	28,000	1.00	20	VFD	Horizontal	CO sensor modulation
EF-6	Kitchen Hood Exhaust	6,500	1.50	10	Direct	Vertical	Grease filters req'd

Tag	Service	CFM	SP (in.)	HP	Drive	Discharge	Notes
EF-7	Elec. Room General Exh.	2,400	0.50	2	Direct	Vertical	Thermostat interlock
EF-8	Janitor / Storage Exh.	800	0.25	0.5	Direct	Vertical	15-min timer delay

4.0 RELIEF FAN SCHEDULE

Tag	Service	CFM	SP (in.)	HP	Drive	Notes
RF-1	Building Relief — West	18,000	0.75	15	VFD	Modulate with building static pressure
RF-2	Building Relief — East	18,000	0.75	15	VFD	Modulate with building static pressure

5.0 INSTALLATION REQUIREMENTS

- All fans: AMCA 210 licensed for air performance and AMCA 300 sound-rated.
- Vibration isolation per ASHRAE HVAC Applications Handbook, Chapter 48.
- All roof penetrations: factory-fabricated curbs, 18-in. minimum height.
- Fan motors: NEMA Premium Efficiency, inverter-duty rated where VFD driven.
- EF-6 (Kitchen): UL 762-listed, grease-tight construction per NFPA 96.
- EF-5 (Parking): CO/NO sensor network per IBC Section 404.1 and IMC 404.
- Balance all exhaust systems per ASHRAE 111; provide TAB report before occupancy.

END OF SECTION 23 34 23